

TB3 24 Fibre Lockable Outdoor FTTH Termination Box

A robust ABS IP65 termination box designed to house and manage up to 24 terminated fibres with LC, SC, FC or ST adaptors. It has an internal detachable tray with bend radius protection, integrated cable tie points, 24 drop cable exit points and 2 cable entry points which maintain the IP65 rating. It can accommodate 1x4, 1x8, 1x16, 2x4, 2x8 and 2x16 PLC splitters and it's suitable for both wall and pole mounting applications.

Features

- Up to 24 fibres
 - Available with LC, SC, ST or FC adaptors
 - Compatible with 1x4, 1x8, 1x16, 2x4, 2x8 and 2x16 PLC splitters
 - Wall or pole mounted
 - IP65 rated for outdoor use
 - Lockable door for enhanced security
 - Detachable tray with integrated bend radius control
 - Integrated cable tie points for securing incoming cable
 - Supplied with transit tubing, wall fixings, tie wraps, splice protectors
 - Sealing glands for up to 16 exiting + 2 incoming cables
 - ROHS, REACH and SvHC compliant
-


Applications

- FTTH
 - Outdoor applications
 - Telecommunication networks
 - CATV
 - Data communication networks
 - Ethernet, Fibre Channel, ATM, LAN, MAN and WAN
-

Specifications

ELEMENT	VALUE
Height	309mm
Width	229mm
Depth	114.1mm
Suitable for Adaptor Type	LC Duplex, SC Simplex, ST, FC
Number of ports	24
Cable Entry	2
Cable Exit	24
Material	ABS
Operating Temperature	-40°C to +60°C
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754
Compliant to	RoHS, Reach/SVHC

Ordering Information


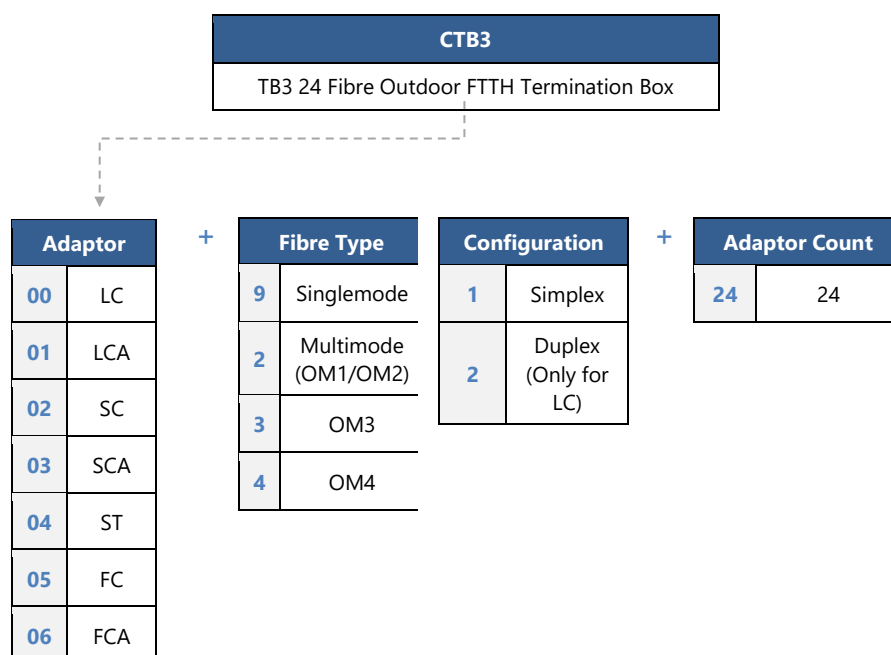


Example:

CTB3-03-91-24 - TB3 Outdoor FTTH Termination Box Loaded With 24 SC/APC Simplex Adaptors

CTB3-XX-XX-UL - TB3 Outdoor FTTH Termination Box Unloaded

Technical Drawing

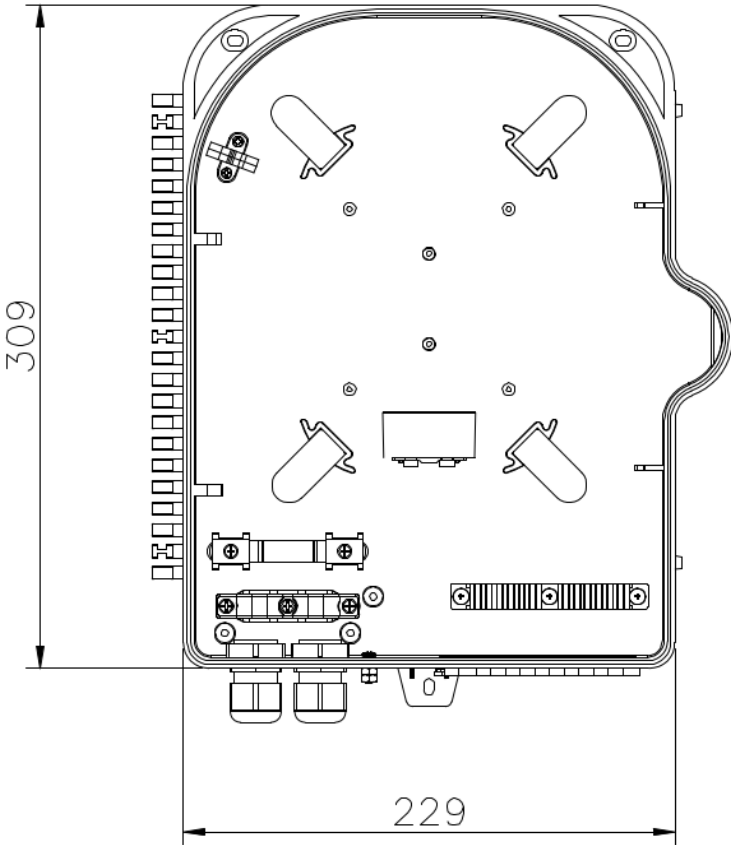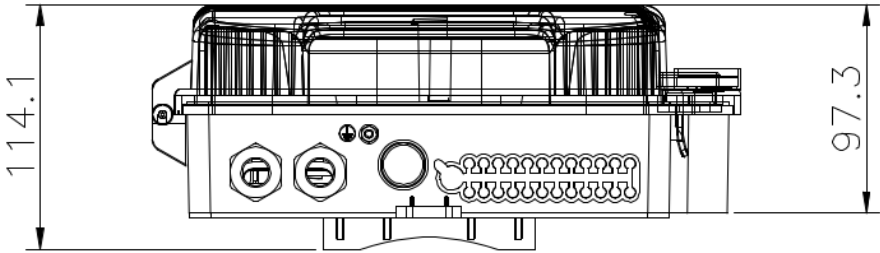

Additional Images

